


318*LSZH LOW SMOKE FLEXIBLE MULTICORE

Flexible plain annealed copper conductors, XLPE insulated/LSZH sheathed.

300/500 volts grade generally to BS6500 and BS6724. (* Denotes number of cores)

SIZE SQ.MM	NUMBER OF CORES	RT OF INSULATION MM	NOMINAL DIAMETER OVER LAID UP CORES MM	NOMINAL OVERALL DIAMETER MM	WEIGHT KG/KM
0.5	2	0.6	4.2	5.6	44
0.75	2	0.6	4.6	6.0	50
1.0	2	0.6	4.8	6.4	61
1.5	2	0.6	5.8	7.4	77
2.5	2	0.7	7.2	9.2	94
4.0	2	0.8	8.4	10.2	171
6.0	2	0.8	9.8	11.8	248
10	2	1.0	12.4	14.6	391
16	2	1.0	14.6	16.8	530
0.5	3	0.6	4.5	6.3	50
0.75	3	0.6	4.9	6.5	61
1.0	3	0.6	5.2	6.8	72
1.5	3	0.6	6.2	8.0	94
2.5	3	0.7	8.0	10.0	143
4.0	3	0.8	9.0	11.1	212
6.0	3	0.8	10.5	12.5	284
10	3	1.0	13.4	15.6	455
16	3	1.0	15.7	18.3	685
0.5	4	0.6	5.4	6.8	70
0.75	4	0.6	5.6	7.2	85
1.0	4	0.6	5.8	7.6	105
1.5	4	0.6	7.0	9.0	135
2.5	4	0.7	8.9	10.8	200
4.0	4	0.8	10.2	12.2	290
6.0	4	0.8	11.8	14.0	372
10	4	1.0	15.0	17.5	600
16	4	1.0	17.6	20.4	870
0.5	5	0.6	5.8	7.5	85
0.75	5	0.6	6.2	8.0	100
1.0	5	0.6	6.5	8.3	130
1.5	5	0.6	8.0	10.4	170
2.5	5	0.7	9.7	12.1	255
4.0	5	0.8	12.0	15.0	360
0.5	7	0.6	6.3	8.5	115
0.75	7	0.6	6.9	8.7	145
1.0	7	0.6	7.2	9.4	180
1.5	7	0.6	8.7	10.9	245
2.5	7	0.7	10.8	13.4	350
4.0	7	0.8	13.2	16.0	510
0.5	12	0.6	8.9	10.4	200
0.75	12	0.6	9.6	11.8	250
1.0	12	0.6	10.0	12.3	300
1.5	12	0.6	12.1	14.5	390
2.5	12	0.7	15.0	17.6	570
0.5	16	0.6	10.1	12.3	250
0.75	16	0.6	11.0	13.3	320
1.0	16	0.6	11.5	14.2	380
1.5	16	0.6	14.8	17.5	515
2.5	16	0.7	17.0	19.8	765
0.5	20	0.6	11.5	13.9	315
0.75	20	0.6	13.8	16.1	420
1.0	20	0.6	14.5	16.8	480
1.5	20	0.6	15.0	18.0	660
2.5	20	0.7	18.6	21.4	910

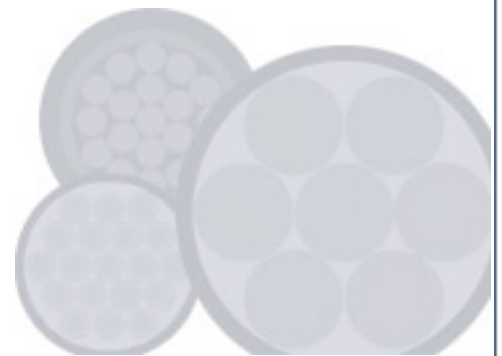

Date created: 02.04.2003

Telephone: +44 (0)121 508 6890

Fax: +44 (0)121 508 6891

Web: www.cablesbritain.com

Email: sales@cablesbritain.com