

## A2P NYLON INDUSTRIAL GLAND

### APPLICATION

Nylon gland for use with unarmoured cable providing mechanical retention of the cable and an IP66 seal on the outer sheath.


### STANDARDS / APPROVALS

A2Pe BASEEFA APPROVED  
EExe Certified EN50014 & EN50019

### ACCESSORIES

glands come complete with earth tags,  
lock nuts and shrouds where required.

## A2Pe NYLON INCREASED SAFETY (EEx'e') GLAND

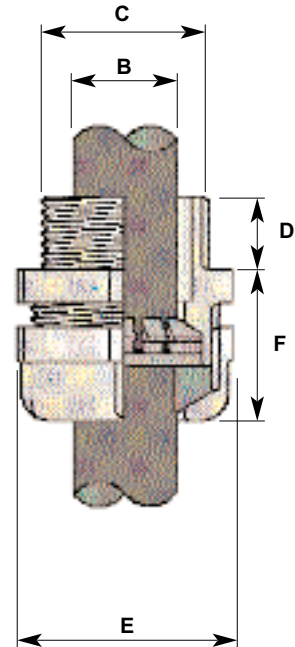

INDUSTRIAL & EEXE RANGE							
ENTRY THREAD	M16	M20	M25	M32	M40	M50	M63
MIN THREAD LENGTH 'D'	9	10	11	12	14	16	16
SEAL RANGE	5 8	8 13	13 19	18 25	24 32	29 38	36 44
ACROSS FLATS 'B'	19	24	32	41	52	59	65
MIN PROTRUSION 'C'	17	19.5	21.5	24.5	29	31.5	32.5