

## A2 INDUSTRIAL GLAND

## A2F DUAL CERTIFIED EEx'd' & EEx'e'

### A2 SOLO INDUSTRIAL LSF GLAND KIT

#### APPLICATION

Brass gland for use with all types of unarmoured cable where it is essential to provide either an IP66 or an explosion proof seal (certified version) on the outer sheath.

SOLO types are offered for installations requiring Zero Halogen, Low smoke and fume glands.

#### STANDARDS / APPROVALS

A2 BS6121: Part 1: 1989.

A2F - BASEEFA APPROVED - BAS EX94C1293U

EExd & EExe Dual Certified EN50014, EN50018 & EN50019 and BS6121: Part 1: 1989.

A2 - SOLO - BS6121 PART 1: 1989 & BS6583 1987


SOLO Types are London Underground Ltd Approved.

LUL Approval Number R00131

#### ACCESSORIES

glands come complete with earth tags, lock nuts and shrouds where required.

SOLO Types are supplied complete with LSF Shroud, Locknut and Earthtag.

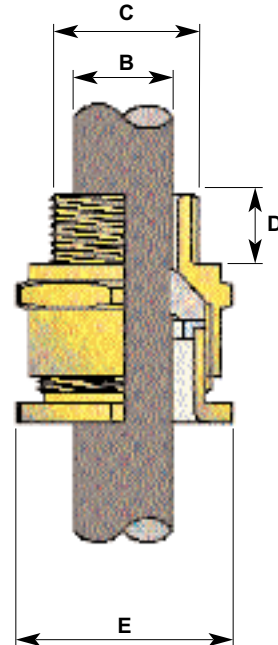

GLAND SIZE	METRIC THREAD 'C'	MIN THREAD LENGTH 'D'	CABLE RANGE 'A'		MAX ACROSS CORNERS DIA 'E'
			MIN	MAX	
20/16	20	15	3.1	8.6	24.4
20S	20	15	6.1	11.6	26.5
20	20	15	6.5	13.9	30.0
25	25	15	11.1	19.9	39.9
32	32	15	17.0	26.2	45.5
40	40	15	22.0	32.1	55.4
50S	50	15	29.5	38.1	61.0
50	50	15	35.6	44.0	66.5
63S	63	15	40.1	49.9	77.6
63	63	15	47.2	55.9	83.2
75S	75	15	52.8	61.9	88.7
75	75	15	59.1	67.9	94.2

Date created: 02.04.2003

Telephone: +44 (0)121 508 6890

Fax: +44 (0)121 508 6891

Web: [www.cablesbritain.com](http://www.cablesbritain.com)

Email: [sales@cablesbritain.com](mailto:sales@cablesbritain.com)