


CXT LIGHT DUTY INDUSTRIAL GLAND

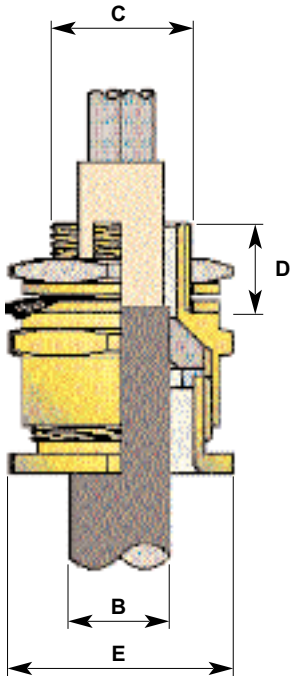

APPLICATION


Brass gland for use with all types of flexible wire braid cable (eg. CY/SY). Used in applications where it is essential to provide an IP66 seal on the outer sheath and clamping of the wire braid for electrical continuity.

ACCESSORIES

As standard CXT glands are supplied complete with locknut and washers to complete installation.

GLAND SIZE	METRIC THREAD 'C'	MIN THREAD LENGTH 'D'	CABLE DIA 'B'		MAX ACROSS CORNERS DIA 'E'
			MIN	MAX	
20/16	20	15	3.1	8.6	24.4
20S	20	15	6.1	11.6	26.5
20	20	15	6.5	13.9	30.0
25	25	15	11.1	19.9	39.9
32	32	15	17.0	26.2	45.5
40	40	15	22.0	32.1	55.4
50S	50	15	29.5	38.1	66.5
50	50	15	35.6	44.0	77.7

CX INDUSTRIAL GLAND

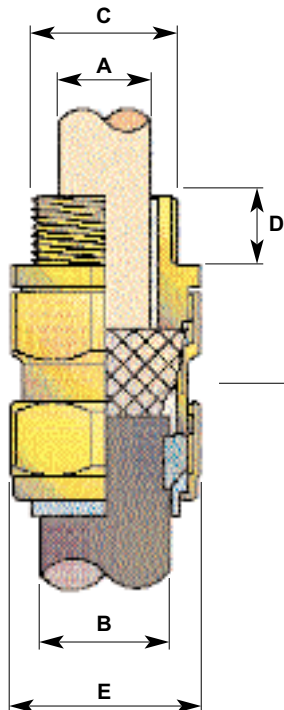

APPLICATION

Brass gland for use with all types of cable having wire braid armour. Used in applications where it is essential to provide an IP66 seal on the outer sheath and clamping of wire braid for electrical continuity. Approved to BS6121: Part 1: 1989

ACCESSORIES

glands come complete with earth tags, lock nuts and shrouds where required.

GLAND SIZE	METRIC THREAD 'C'	MIN THREAD LENGTH	SEAL RANGES		MAX BRAID THICKNESS	MAX ACROSS CORNERS DIA 'E'
			CABLE DIA 'A' MAX	CABLE DIAM 'B' STANDARD SEAL MIN MAX		
20/16	20	15	8.6	8.0 13.4	0.85	24.4
20S	20	15	11.6	11.4 15.9	0.85	26.6
20	20	15	13.9	15.0 20.9	0.90	33.3
25	25	15	19.9	20.3 27.4	1.25	40.5
32	32	15	26.2	26.0 33.9	1.40	51.0
40	40	15	32.1	31.0 40.4	1.40	61.0
50S	50	15	38.1	36.5 46.7	1.40	66.5
50	50	15	44.0	43.0 53.1	1.40	77.7
63S	63	15	50.0	48.9 59.4	1.50	83.2
63	63	15	55.9	58.0 65.9	1.50	88.7
75S	75	15	61.9	60.6 72.1	1.50	101.6
75	75	15	67.9	64.9 78.5	1.60	111.1

CXe EEx'e' increased safety glands are also available

Date created: 02.04.2003

Telephone: +44 (0)121 508 6890

Fax: +44 (0)121 508 6891

Web: www.cablesbritain.com

Email: sales@cablesbritain.com