

CY ALUMINIUM GLAND

APPLICATION


Aluminium gland for use with all types of Aluminium strip armour cable. To provide clamping of the armour strip for electrical continuity and mechanical retention of the cable. Used in applications where it is essential to provide an IP66 seal on the outer sheath.

STANDARDS / APPROVALS

BS6121: Part 1: 1989

ACCESSORIES

glands come complete with earth tags, lock nuts and shrouds where required.

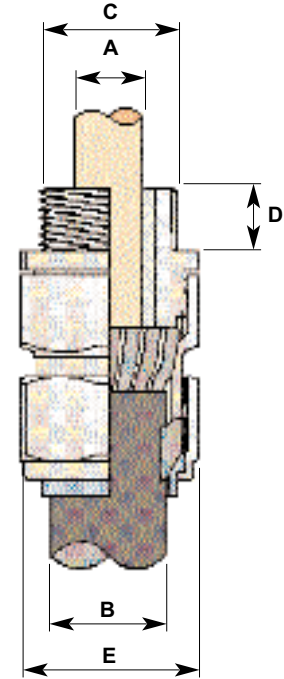

GLAND SIZE	METRIC THREAD 'C'	MIN THREAD LENGTH 'D'	SEAL RANGES			ARMOUR STRIP THICKNESS MM	MAX ACROSS CORNERS DIA 'E'
			CABLE DIA 'A' MAX	CABLE DIA 'B' STD SEAL			
				MIN	MAX		
20S	20	10	11.6	11.4	15.8	0.6	26.6
20	20	10	13.9	15.0	20.9	0.6	33.3
25	25	10	19.9	20.3	27.5	0.6	39.9
32	32	10	26.2	26.0	33.9	0.6/1.0	51.0
40	40	15	32.1	31.0	40.4	1.0/1.4	61.0
50S	50	15	38.1	36.5	46.7	1.4	66.5
50	50	15	44.0	43.0	53.1	1.4/1.8	78.6
63S	63	15	50.0	48.9	59.4	1.8	83.0
63	63	15	55.9	58.0	65.9	1.8	88.7
75S	75	15	61.9	60.6	72.1	1.8	101.6